

### SPECIFICATIONS


DN mm	DN15 - DN80
DN inch	1/2" - 3"
Temperature	-10°C to 95°C
Type of body	F/F
Application	Water distribution, Heating and HVAC
Options	Other specifications on request



### ADVANTAGES


1. Absorb vibration, noises and expansion
2. With galvanised ductile iron union nut connections, stainless steel on request

## DIMENSIONS

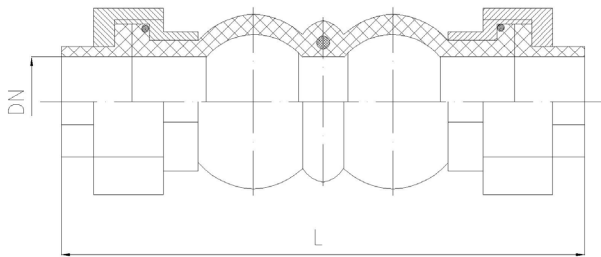

DN mm	DN inch	PFA	L	Stretch	Comp.	Displ.	Angle
15	1/2"	10	200	5 - 6	22	22	45°
20	3/4"	10	200	5 - 6	22	22	45°
25	1"	10	200	5 - 6	22	22	45°
32	1"1/4	10	200	5 - 6	22	22	45°
40	1"1/2	10	200	5 - 6	22	22	45°
50	2"	10	200	5 - 6	22	22	45°
65	2"1/2	10	240	5 - 6	22	22	45°
80	3"	10	250	5 - 6	22	22	45°

## NOMENCLATURE

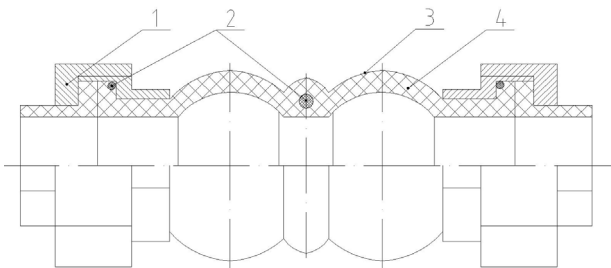

Designation	Materials
1.Union	Ductile iron
2.Pressurized ring	Steel
3.Rubber	EPDM
4.Key frame	Nylon cord fabric

