




SPECIFICATIONS

DN mm	DN25 - DN80
DN inch	1" - 3"
PS	10 bars
Temperature	-10°C to 80°C
Ball	Alu-NBR coated
Type of body	F/F
Threaded	BSP
Application	Waste Water, Viscous liquid, Loaded liquids
Options	Other specifications on request

ADVANTAGES


1. Silent and robust design
2. Very low headloss
3. Excellent sealing guaranteed by the coated ball
4. Self cleaning design to avoid incrustating
5. Carefully designed ball closing system to ensure opening and closing of the valves
6. Full passage when the ball is lifted
7. Vertical ascending and horizontal position

DIMENSIONS

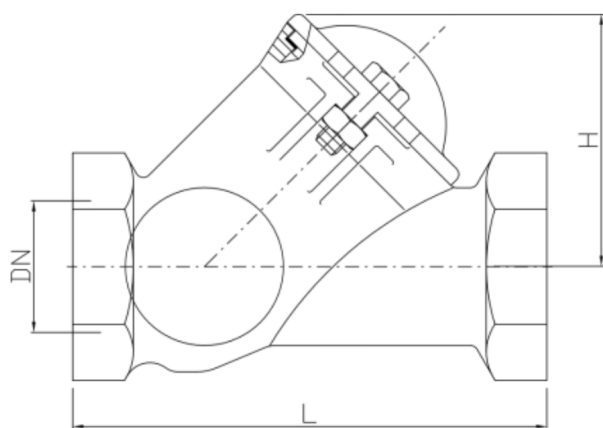

DN mm	DN inch	PFA	L	H
25	1"	10	125	75
32	1"1/4	10	140	85
40	1"1/2	10	140	85
50	2"	10	180	100
65	2"1/2	10	250	165
80	3"	10	250	165

NOMENCLATURE

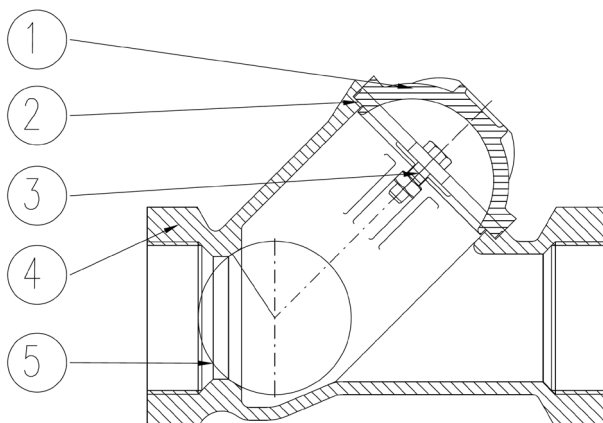

Designation	Materials
1.Cover	DI epoxy coated
2.Seal	NBR
3.Bolts and nuts	Stainless Steel
4.Body	DI epoxy coated
5.Ball	Aluminium NBR coating

