




### SPECIFICATIONS

DN mm	DN32 - DN600
DN inch	1"1/4 - 24"
Temperature	-10°C to 220°C
Type of body	Flange
Application	Oil, Hydrocarbon, Air, Chemicals
Flange	PN 16
Options	Other specifications on request

### ADVANTAGES


1. Absorb vibration, noises and expansion

## DIMENSIONS

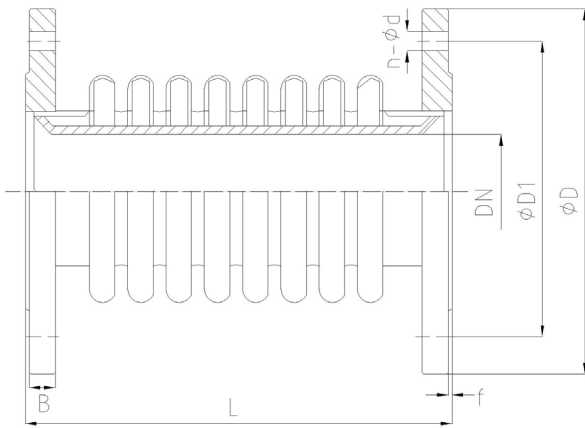

DN mm	DN inch	PFA	L	ØD	ØD1	B	Str.	Co.	Dis.	n-Ød
32	1"1/4	16	140	140	100	18	7	9	9	4-Ø19
40	1"1/2	16	140	150	110	19	7	9	9	4-Ø19
50	2"	16	150	165	125	19	7	9	9	4-Ø19
65	2"1/2	16	160	185	145	19	11	13	13	4-Ø19
80	3"	16	160	200	160	19	15	19	17	8-Ø19
100	4"	16	205	220	180	19	15	21	18	8-Ø19
125	5"	16	210	250	210	19	15	23	18	8-Ø19
150	6"	16	210	285	240	19	15	25	18	8-Ø23
200	8"	16	320	340	295	20	16	28	22	12-Ø23
250	10"	16	330	405	355	22	18	23	23	12-Ø28
300	12"	16	380	460	410	25	25	40	30	12-Ø28
350	14"	16	380	520	470	27	28	38	27	16-Ø28
400	16"	16	420	580	525	28	32	33	27	16-Ø31
450	18"	16	380	640	585	30	32	36	27	20-Ø31
500	20"	16	485	715	650	32	48	50	38	20-Ø34
600	24"	16	500	840	770	36	46	53	38	20-Ø37

## NOMENCLATURE

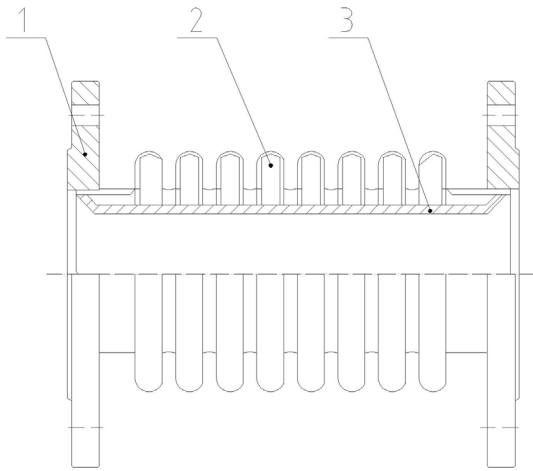

Designation	Materials
1.Flange	Carbon steel / Stainless steel 304 / Stainless steel 316
2.Bellows	Stainless steel
3.Sleeve	Carbon steel

