

SPECIFICATIONS


DN mm	DN15 - DN50
DN inch	1/2" - 2"
Temperature	-10°C to 220°C
Type of body	M/M
Application	Hot or cold water services, Household, HVAC system
Threaded	BSP
Options	Other specifications on request



ADVANTAGES

1. Absorb vibration, noises and expansion

DIMENSIONS

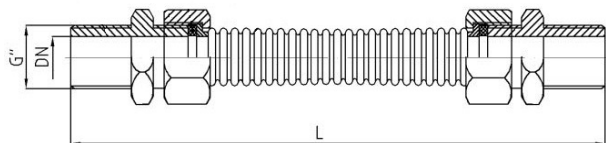

DN mm	DN inch	PFA	Connection	L
15	1/2"	16	3/4"	280
20	3/4"	16	1"	280
25	1"	16	1"1/4	280
32	1"1/4	16	1"1/2	280
40	1"1/2	16	2"	300
50	2"	16	2"1/2	300

NOMENCLATURE

Designation	Materials
1.Union	Carbon steel / Stainless steel 304 / Stainless steel 316
2.Nut	Carbon steel / Stainless steel 304 / Stainless steel 316
3.O-ring	PTFE
4.Bellows	Stainless steel

