

SPECIFICATIONS


DN mm	DN 15 - 200
DN inch	1/2 - 8"
Temperature	-25°C to 180°C
Pressure range	10/16
Connection	Flanges - EN 1092-2
Body material	Stainless steel CF8M
Application	Waste water, Water supply, Water distribution, Pumping
Options	Other specifications on request



ADVANTAGES


- Equipped with a purge for easy maintenance.
- Stainless steel 304 screen, possible to customize the mesh.
- Horizontal or vertical installation.

PARTS LIST

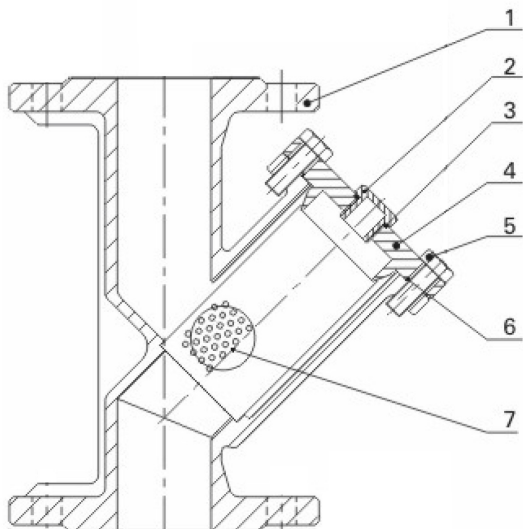

N°	Designation	Qty	Materials
1	Body	1	Stainless steel CF8M
2	Blow off plug	1	Stainless steel CF8M
3	Gasket	1	PTFE
4	Cap	1	Stainless steel CF8M
5	Bolt	1	Stainless steel/CF8
6	Gasket	1	PTFE
7	Screen	1	Stainless steel CF8M

DIMENSIONS

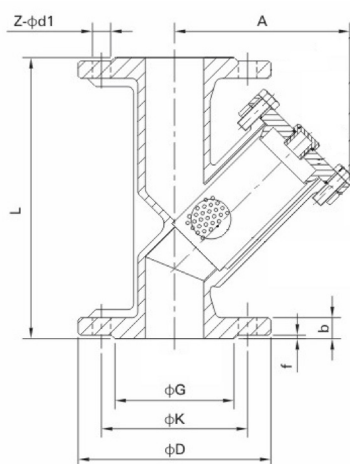

DN mm	DN inch	PN	Weight kg
15	1/2"	16	1.79
20	3/4"	16	2.57
25	1"	16	3.6
32	1 1/4"	16	4.72
40	1 1/2"	16	6.02
50	2"	16	9
65	2 1/2"	16	12,81
80	3"	16	17.36
100	4"	16	20,03
125	5"	16	30
150	6"	16	40,50
200	8"	16	76.9

DN mm	d	G	K	D	L	A	b	f	D1	L1	W	d2	z-φd1
15	15	45	65	95	130	75	14	2	22	58	2	1	4-φ14
20	20	58	75	105	150	90	16	2	26	65	2	1	4-φ14
25	25	68	85	115	160	100	16	2	32	72	2	1	4-φ14
32	32	78	100	140	180	115	16	2	37	83	2	1	4-φ14
40	40	88	110	150	200	130	16	3	47	95	2	1	4-φ14
50	50	102	125	165	230	150	18	3	57	114	2	1	4-φ14
65	65	122	145	185	290	190	18	3	69	152	3,5	2	4-φ14
80	80	138	160	200	310	225	20	3	84	176	3,5	2	8-φ18
100	100	158	180	220	350	230	20	3	105	180	3,5	2	8-φ18
125	125	188	210	250	400	280	22	3	134	217,5	3,5	2	8-φ18
150	150	212	240	285	480	300	22	3	164	216	3,5	2	8-φ18
200	200	268	295	340	605	400	24	3	218	282,5	3,5	2	12-φ22