



BALL CHECK VALVES - C400P



SPECIFICATIONS

DN mm	DN 32 - 50
DN inch	1.25 - 2"
Temperature	0°C to 60°C
Pressure range	10
Connection	Female/Female - BSP
Body material	UPVC
Ball	NBR coated ball
Application	Waste Water, Viscous liquid, Loaded liquids
Options	Joint end : socket (ANSI / DIN / JIS / BS)


ADVANTAGES

- Installed on liquid and water pipelines as a safety device to auto matically prevent the backflow of media.
- Better anti-aging performance.
- Excellent corrosion resistance.
- Low resistance.
- High flow rate.
- This check valve should be installed vertically and can not be installed horizontally or diagonally.




BALL CHECK VALVES - C400P

PARTS LIST

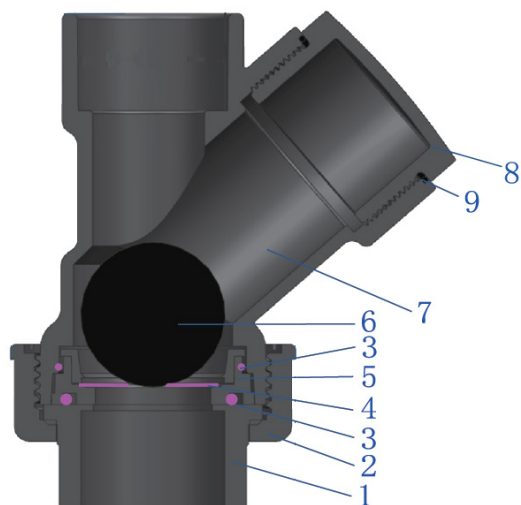

N°	Designation	Materials
1	End connector	UPVC
2	Union nut	UPVC
3	O-ring	EPDM
4	Gasket	EPDM
5	Carrier	UPVC
6	Ball	NBR coated ball
7	Body	UPVC
8	Male plug	UPVC
9	O-ring	EPDM

DIMENSIONS

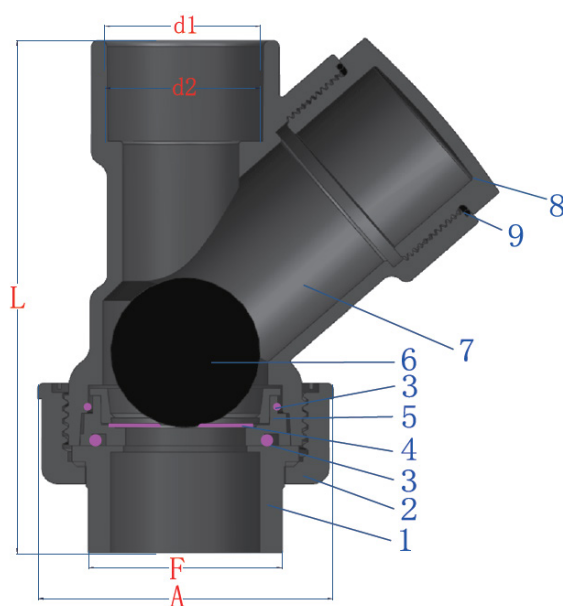

DN mm	DN inch	PN	PFA bar
32	1"1/4	10	10
40	1"1/2	-	10
50	2"	10	10

DN mm	Glued	A	F	L	d1 (DIN)	d2 (DIN)
32	40	79	51,9	143,54	40,4	40
40	50	94	62	162,7	50,3	49,9
50	63	117,6	75,4	194,5	63,5	62,9