



BALL CHECK VALVES - SS 316 BODY - THREADED F/F - C400X

SPECIFICATIONS

DN mm	DN 25 - 50
DN inch	1 - 2"
Temperature	-10°C to 80°C
PS	40 Bar
Ball	Alu-NBR coated
Type of body	F/F
Threaded	BSP
Application	Waste water, viscous liquid, loaded liquids
Options	Other specifications on request




ADVANTAGES

- Silent and robust design.
- Very low head loss.
- Excellent sealing guaranteed by the coated ball.
- Self-cleaning design to prevent deposits and scaling.
- Carefully designed ball closing system to ensure smooth opening and closing of the valve. Full bore when the ball is lifted.
- Suitable for vertical upward or horizontal installation.




BALL CHECK VALVES - SS 316 BODY - THREADED F/F - C400X

PARTS LIST

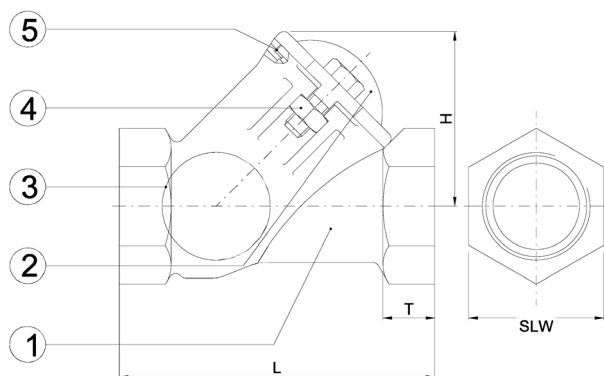

N°	Designation	Materials
1	Body	CF8M
2	Cover	CF8M
3	Ball	Carbon steel with vulcanized NBR
4	Bolts & nuts & washer	Bolts/Nuts
5	O-ring	NBR

DIMENSIONS

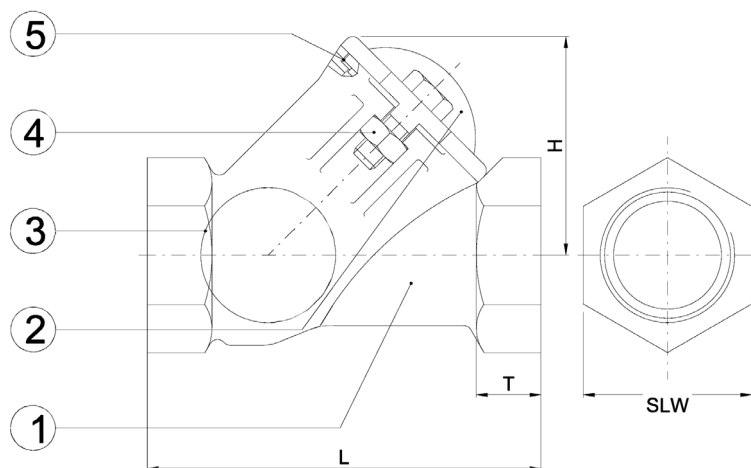

DN mm	DN inch	PN	PFA bar
40	1"1/2	-	10
50	2"	-	10

DN mm	L	T	H	SLW
40	140	25	90	60
50	180	25	98	74