




SPECIFICATIONS

DN mm	DN 65 - 200
DN inch	2"1/2 - 8"
Temperature	Max 70°C
Pressure range	10/16
Connection	Flanges - EN 1092-2
Application	Wastewater, contaminated liquids
Options	Other specifications available upon request

ADVANTAGES


- Ball valves are self-cleaning and provide full flow. The rotation of the ball during operation removes impurities.
- Full flow ensures minimal pressure loss and eliminates the risk of deposits.
- The valve is supplied as standard with an NBR rubber ball.
- As an option, Viton® and polyurethane balls in different weights are available.
- An optional ball lifting system is also available.
- Suitable for vertical or horizontal installation.

PARTS LIST

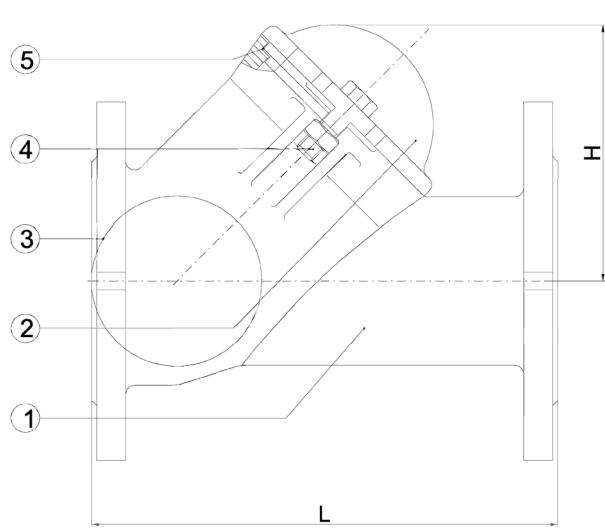

N°	Designation	Materials
1	Body	CF8M
2	Cover	CF8M
3	Ball	Carbon steel with vulcanized NBR
4	Bolts and nuts	Bolts/Nuts
5	O-ring	NBR

DIMENSIONS

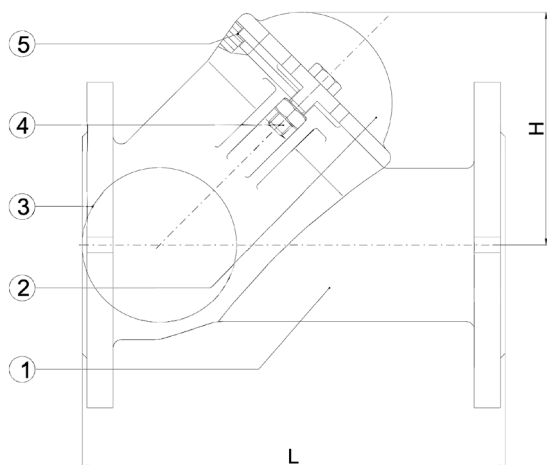

DN mm	DN inch	PN	PFA bar	Weight kg
65	2"1/2	16	-	13
80	3"	16	-	13
100	4"	10	-	18
150	6"	10	-	37
200	8"	10	-	68

DN mm	L	H
65	240	120
80	260	145
100	300	180
150	400	234
200	500	310