



BALL CHECK VALVES - PVC - C400P



SPECIFICATIONS


DN mm	DN 32 - 50
DN inch	1"1/4 - 2"
Temperature	0°C to 60°C
Pressure range	10 bars
Connection	Female/female or to be glued
Body material	UPVC
Ball	NBR coated ball
Application	Waste Water, Viscous liquid, Loaded liquids

ADVANTAGES


- Silent and robust design.
- Automatically prevents backflow in water and liquid pipelines.
- Excellent corrosion resistance.
- Low head loss.
- High flow capacity.
- For vertical installation only. The check valve must not be installed horizontally or diagonally.



PARTS LIST

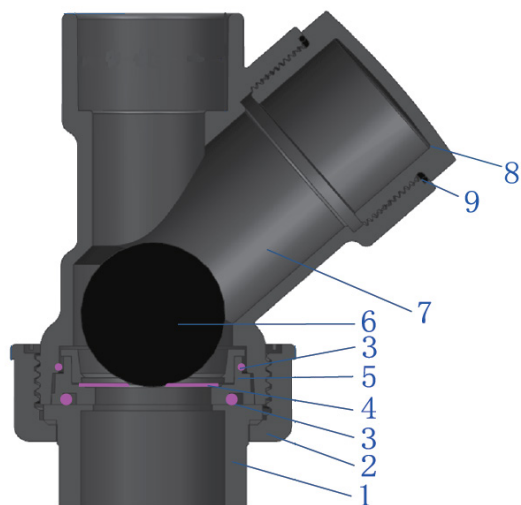

DIMENSIONS

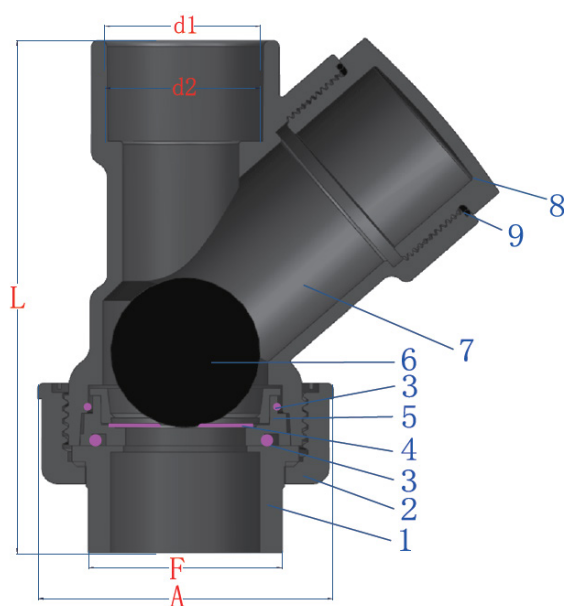

DN mm	DN inch	PN	PFA bar
32	1"1/4	10	10
40	1"1/2	10	10
50	2"	10	10