



BALL CHECK VALVES - SS 316 BODY - THREADED F/F - C400X

SPECIFICATIONS

DN mm	DN 40 - 50
DN inch	1"1/2 - 2"
Temperature	-20°C to 85°C
PFA	16 Bar
Ball	Steel with NBR coating
Type of body	Female/Female
Threaded	BSPP
Application	Wastewater, contaminated liquids
Options	Other specifications on request




ADVANTAGES

- Silent and robust design.
- Very low headloss.
- Excellent sealing guaranteed by the coated ball.
- Self cleaning design to avoid incrustating.
- Carefully designed ball closing system to ensure opening and closing of the valves.
- Full passage when the ball is lifted.
- Access cover for easy maintenance.
- Vertical ascending and horizontal position.




BALL CHECK VALVES - SS 316 BODY - THREADED F/F - C400X

PARTS LIST

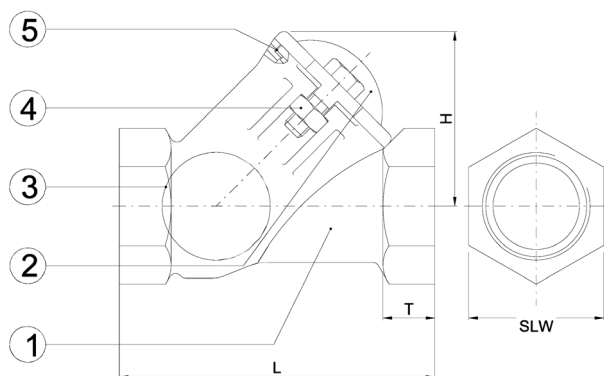

N°	Designation	Materials
1	Body	CF8M
2	Cover	CF8M
3	Ball	Steel NBR coated
4	Bolts & nuts & washer	A4
5	O-ring	NBR

DIMENSIONS

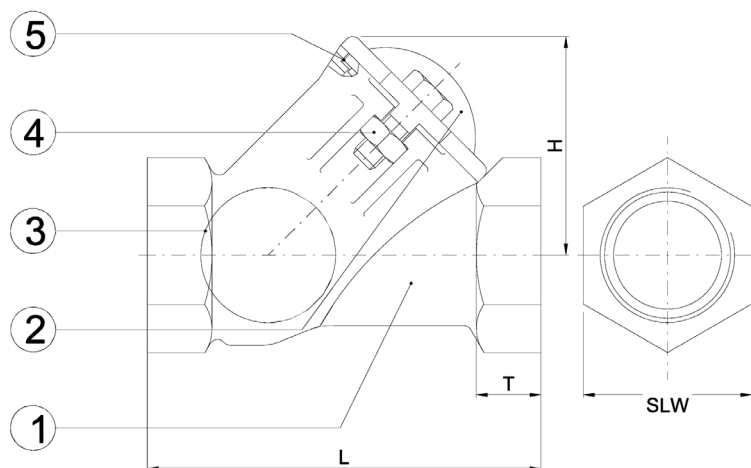

DN mm	DN inch	PN	PFA bar
40	1 1/2	-	16
50	2	-	16

DN mm	L	T	H	SLW
40	140	25	90	60
50	180	25	98	74