



BALL VALVE - SS 316 BODY - FLANGED - C401X



SPECIFICATIONS

DN mm	DN 65 - 200
DN inch	2"1/2 - 8"
Temperature	-20 to 85°C
Pressure range	10/16 bars
Connection	Flanges - EN 1092-1
Ball	Steel with NBR coating
Application	Wastewater, contaminated liquids
Options	Other specifications available upon request


ADVANTAGES

- Silent and robust design.
- Very low headloss.
- Excellent sealing guaranteed by the coated ball.
- Self cleaning design to avoid incrustating.
- Carefully designed ball closing system to ensure open^{ing} and closing of the valves.
- Full passage when the ball is lifted.
- Access cover for easy maintenance.
- Vertical ascending and horizontal position.




BALL VALVE - SS 316 BODY - FLANGED - C401X

PARTS LIST

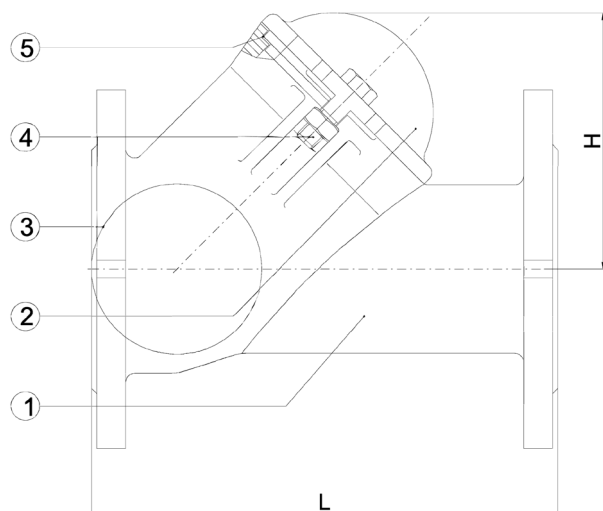

N°	Designation	Materials
1	Body	CF8M
2	Cover	CF8M
3	Ball	Steel NBR coated
4	Bolts and nuts	A4
5	O-ring	NBR

DIMENSIONS

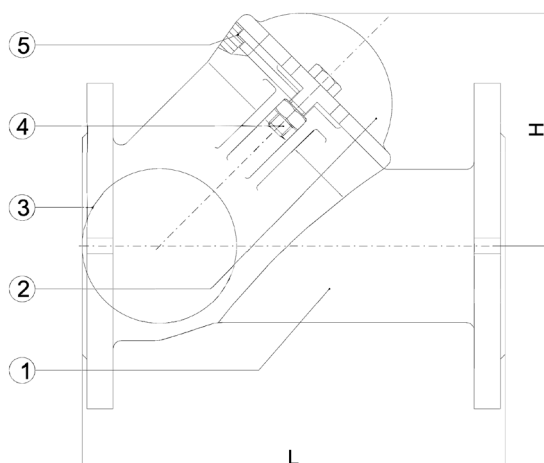

DN mm	DN inch	PN	PFA bar	Weight kg
65	2"1/2	10/16	16	13
80	3"	10/16	16	13
100	4"	10/16	16	18
150	6"	10/16	16	37
200	8"	10	10	68

DN mm	L	H
65	240	120
80	260	145
100	300	180
150	400	234
200	500	310